


POINT 65°N

Kayaks SWEDEN



AIR
Ultra Comfort Technology
assembly guide

How to assemble the Point 65 AIR seat



AIR
Ultra Comfort Technology

The tools needed for instalation are:
Drill with 7 mm, 4,2 mm and 2 mm drill bit
Glue
Scissors
Clamp tool to tighten cramps



The AIR Seat package includes:

- 1. Seat pad
- 2. Back rest pad
- 3. Left hip air bag
- 4. Back rest air bag
- 5. Thigh lift air bag
- 6. Right hip air bag

- 7. 3 x rubber tube
- 8. 3mm shock cord
- 9. 3pcs Air pumps
- 10. Ø 6mm PU air tube
- 11. 4 x pine tree screws - Large
- 12. T-connector
- 13. 8 x pine tree

- 14. 14pcs stepless cramps
- 15. 20 x PVC washers (not shown)
- 16. Seat PE
- 17. Backrest PE
- 18. 5,5mm shock cord
- 19. Clear or white 2mm cable ties (not shown)



Attach the 6mm PU tube to the air bag valve. Make sure to glue it with fast drying permanentsuper glue.




The Valve on the Air bag should fit in the hole on the seat.

3.




Attach the Thigh Air bag and the Back rest Air bag with the small pine tree onto the seat and back rest. The hip pads should not be attached until later.

4.

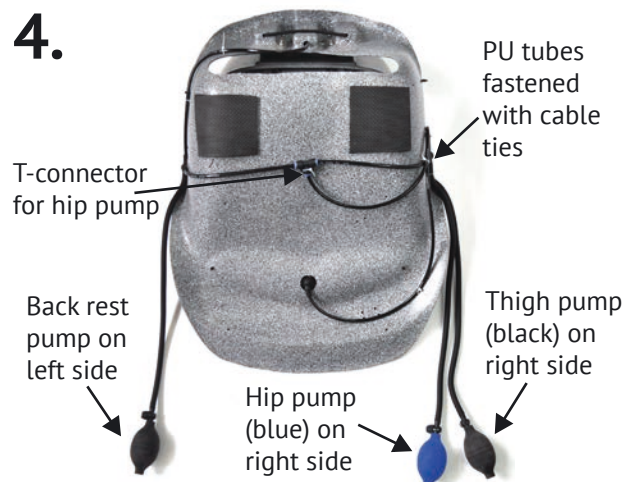


Attach the PU tubes to the rubber tube with glue. The hand pumps should be fastened to other end of rubber tubes with glue. Fasten the PU tubes with cable ties to the seat to keep them in place.

5.

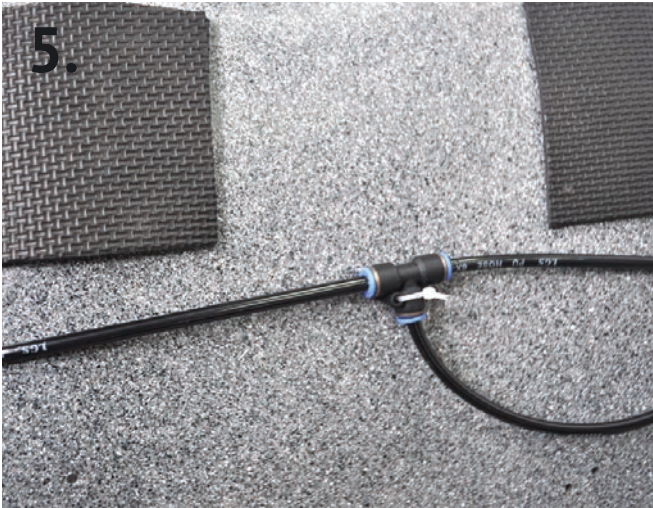


Attach the 6mm PU tube to the air bag valve. Make sure to glue it with fast drying permanent super glue.

6.

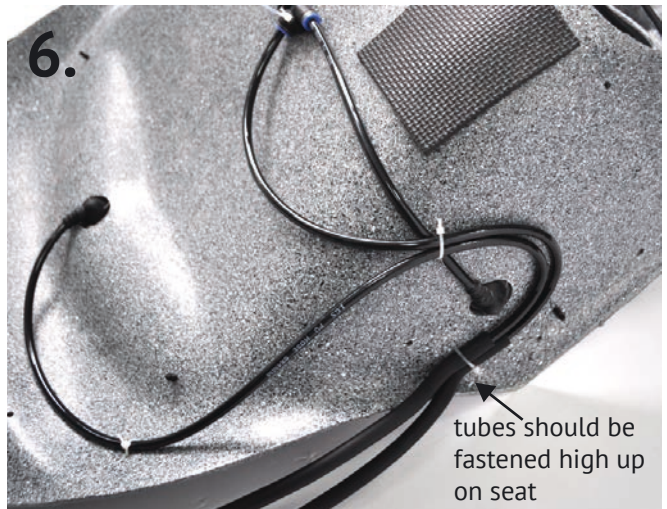

The PU tube and rubber tube should connect with glue. Also use cable ties where they connect.

7.

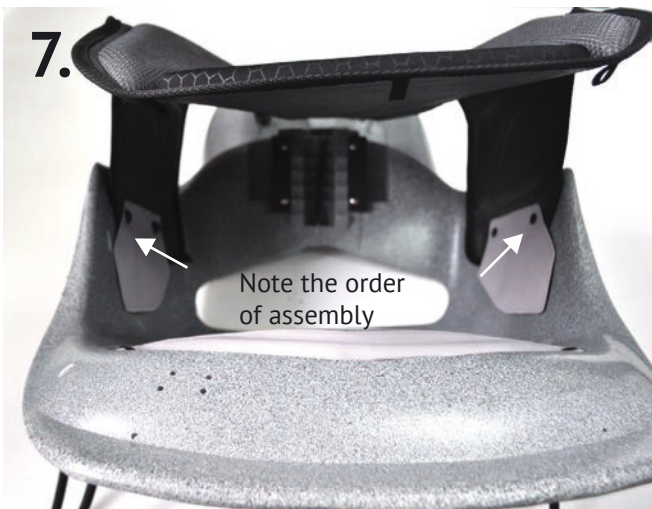

Start attaching the seat pad to the seat on the hips. The 2 piece pine tree should be used in this areas with the 6mm hole. Make sure the hip airbags are attached as on the image above, if assembled in wrong order, the hip pad will not inflate properly.

8.



The plastic pine tree screws should have clear PVC washers on both sides of seat pad to prevent the head from ripping through the seat pad. Make sure to use the 4,2 mm drill for the holes in the seat. If bigger hole is used, the pine tree will not hold fast.



9.



Attach the seat pad with plastic pine trees. Backrest is added at the end of assembly in the kayak.



Fasten the front of the seat pad with the 3mm Shock cord. Use only the loops under the seat at each side, not the one in center.

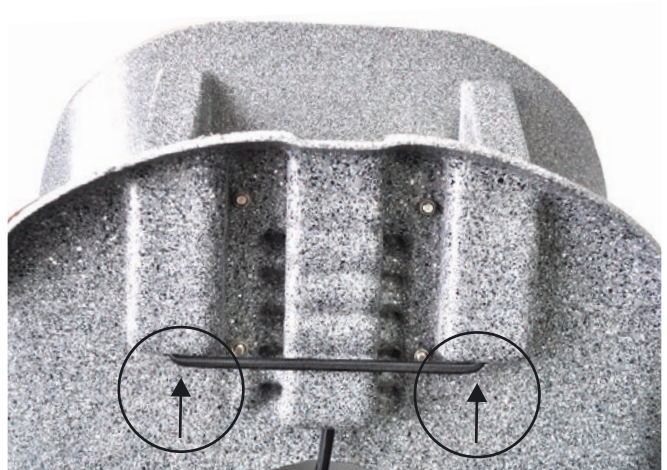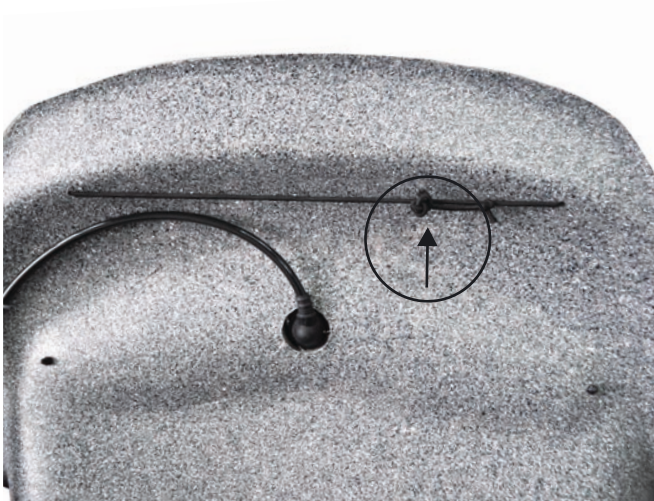



Finished AIR seat



Before installation the airbags should be inflated and deflated for test.



Finished AIR Seat installation